

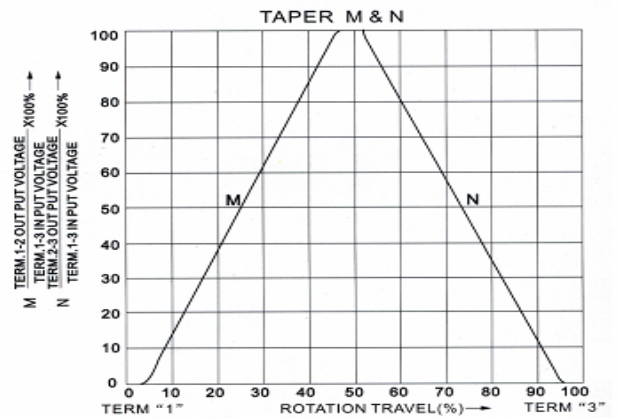
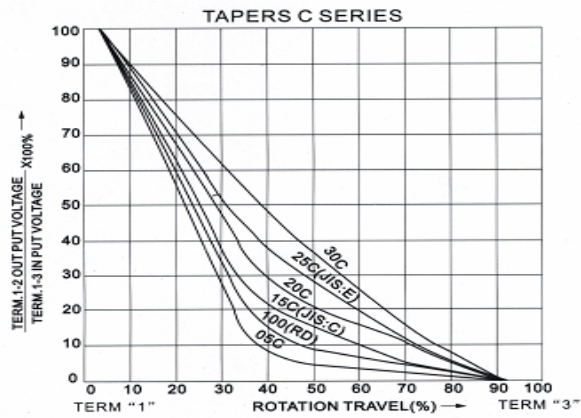
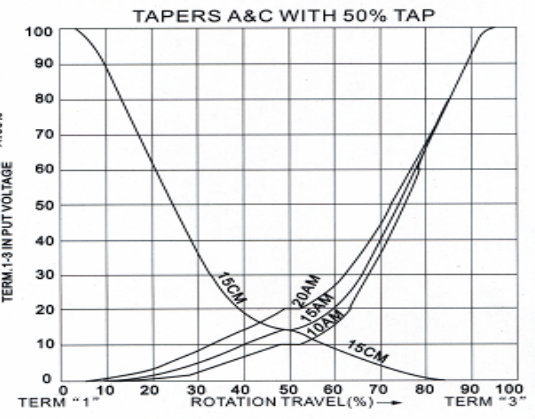
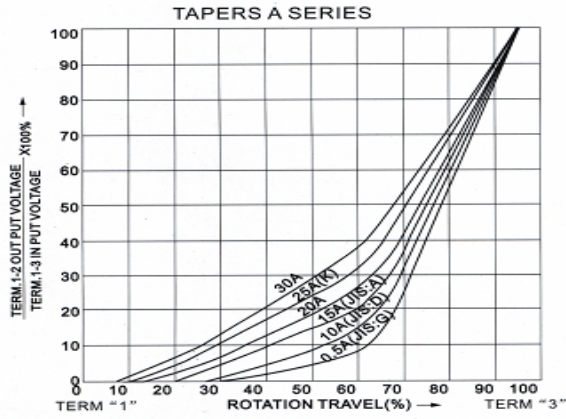


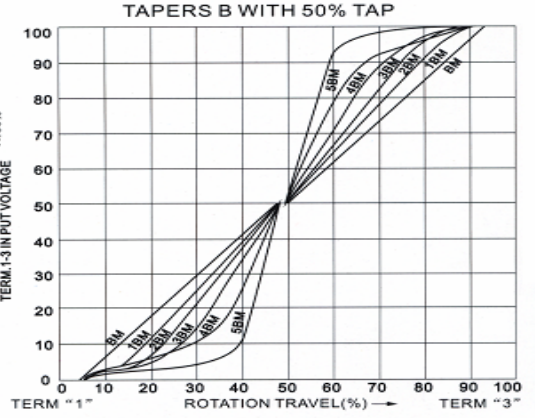

20 30 45 60 行程直滑式电位器 C□□43N-A3- 基本信息

一. 机械性能:					
项目		规格			
滑动力		20~ 200gf. cm			
C.C 脱出力		30 ~ 250 gf. cm (used for CC, 适用于带 CC 機種)			
止动强度		3Kgf. cm			
轴推拉强度		3Kgf. cm			
柄的晃动		2 (2*L) /20 mm max. (1:Lever length both side)			
柄的偏心量 (单侧)		0.5 max. (one side)			
二. 电气性能:					
标准阻值范围		1KΩ ~ 2MΩ			
标准阻值容许差		□± 10% □± 15% □± 20% □± 30%			
残留阻抗值		R≥250KΩ 0.1%MAX. OF TOTAL RESISTANCE 250KΩ >R>10KΩ 20Ω MAX 10KΩ ≥R 10Ω MAX			
阻值变化特性		□A □B □C			
定格功率 (W)	TRAVEL	20mm	30mm	45mm	60mm
	TAPER				
	B	0.1	0.2	0.25	0.2
	Except B(B以外)	0.5	0.1	0.125	0.2
折动杂音		Less than 100 mV MAX			
最高使用电压 (AC V)	TRAVEL	20mm	30mm	45mm	60mm
	TAPER				
	B	200	200	200	200
	Except B(B以外)	150	150	150	150
绝缘阻抗		100MΩ min. at 250V DC			
耐电压		for 1 minute or more at AC 300V			
三. 耐久性能:					
回转寿命		15,000cycles			
使用温度		-10℃~70℃			

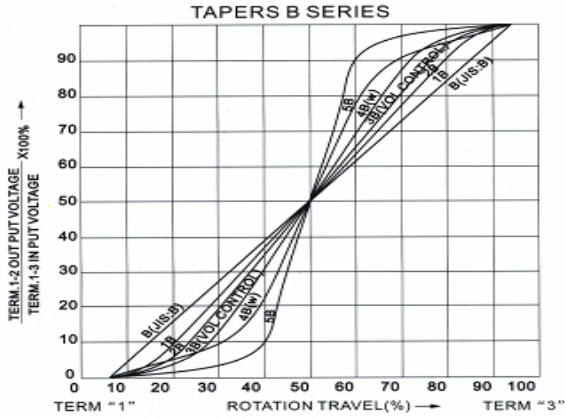

注意事项:

1. 如需求上述规格以外的产品, 请联络本公司询问。
2. 相关技术参数以正式的产品规格书为准, 请在使用时仔细确认。